

Max

GPS Settings

Depending on the correction type you select (see “Correction Type” different buttons may appear on the GPS Settings panel (as shown in Figure 1-6).



Figure 1-6: Correction types and related GPS Settings panel buttons

Correction Type

Note: See Figure 1-6 for an overview of the effect of selecting a specific correction type.

1. Press **Menu > Settings > GPS Settings > Correction Type**. The Correction Type panel appears (shown at right).
2. Select a correction type from the drop-down.
3. Press **Save**.
4. Press **Back/Close** repeatedly or press the Close arrows to close the panels and return to the map.



GPS Status Information

The GPS Status screen displays GPS information you may find useful, especially if you need to troubleshoot an issue. The fields on the screen are partially dependent on your selected correction type (SBAS, RTK, or OmniSTAR)—for example, some of the fields appear regardless of the correction type, but fields such as RTK Mode and Base Slip only appear when RTK is the correction type.


SBAS Settings

The SBAS Settings panel allows you to change the SBAS satellites used in the system's position calculation. The default value for each SBAS setting is Auto (Outback MAX automatically selects from the available satellites).

If you change any of these settings and then set any of them back to Auto all three are automatically set back to Auto (you cannot have a mix of manual and auto settings).

Note: You can only edit/view SBAS settings if you set the Correction Type to SBAS. See "Correction Type" on page 19 for more information.

1. Press **Menu > Settings > GPS Settings > SBAS Settings**. The SBAS Settings panel appears.
2. For each of the SBAS buttons:
 - a. Press the button to display a panel for that button. The panel shows the available satellites to select.
 - b. Use the scroll buttons to scroll through the list of satellites and then press to select the desired satellite. The panel closes and the selected satellite is displayed on the button.
3. Press **Back/Close** repeatedly or press the Close arrows to close the panels and return to the map.

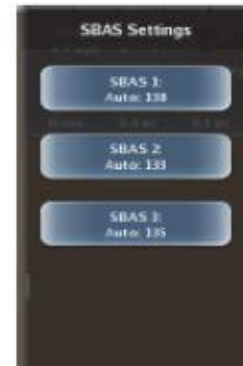

Set “SBAS 1” to 135

Set “SBAS 2” to Auto

Set “SBAS 3” to Auto

**Thank you for supporting Vanee Farm Centre.
If you require any assistance with these
changes, please call your Precision Specialist.**

Nolan Pitt	403-852-0064
James Siebert	403-308-4012
John Reimer	403-308-7327